MODEL: 50333DT

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

UNPACK THE FOUNTAIN

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS: UPPER COLUMN, UPPER RESERVOIR, MIDDLE COLUMN, MIDDLE RESERVIOR, LOWER COLUMN, LID, LOWER RESERVOIR, BASE, PUMP, (4) LED LIGHTS, LIGHT POWER CORD AND TRANSFORMER.

FOUNTAIN ASSEMBLY

1. PLACE LOWER RESERVOIR ON TOP OF BASE AND ROTATE THE RESERVOIR CLOCKWISE TO SECURE.

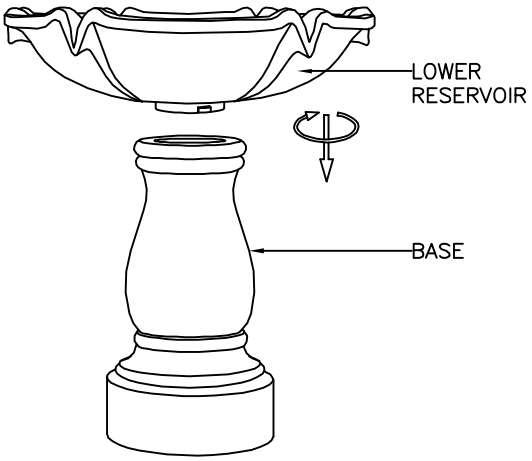

2. FEED THE PUMP POWER CORD AND LIGHT POWER CORD THROUGH THE PLASTIC TUBE TOWARD BOTTOM OF BASE, CORD EXIT OUT FROM CHANNEL ON THE BOTTOM OF THE BASE.

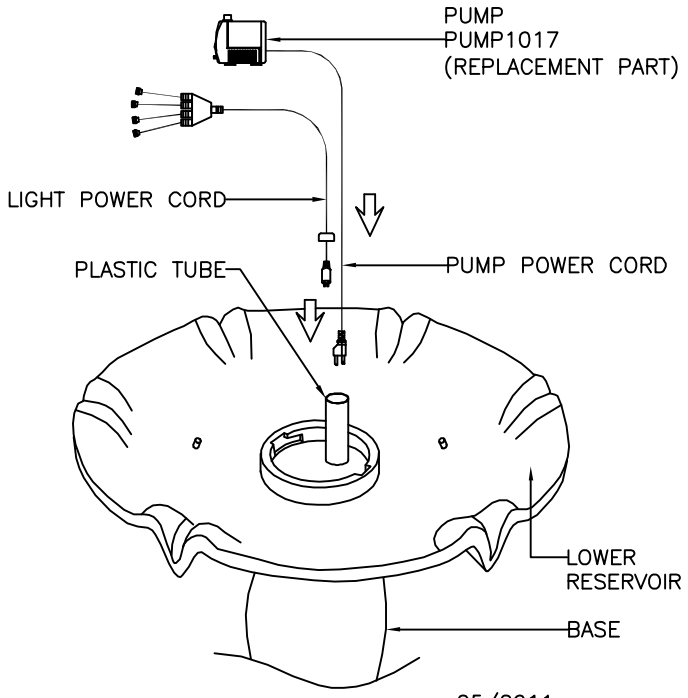

3. PLACE PUMP AND LIGHT POWER CORD IN CENTER OF THE LOWER RESERVOIR.

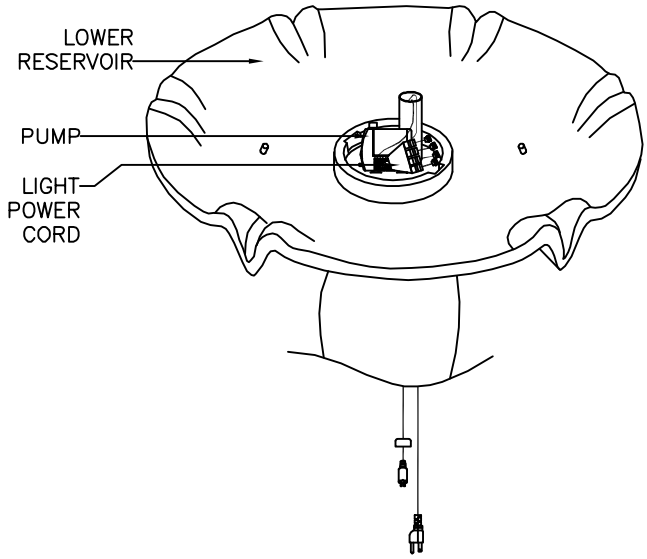

4. PLACE LOWER COLUMN INTO LOWER RESERVOIR AND ROTATE THE LOWER COLUMN CLOCKWISE TO SECURE.

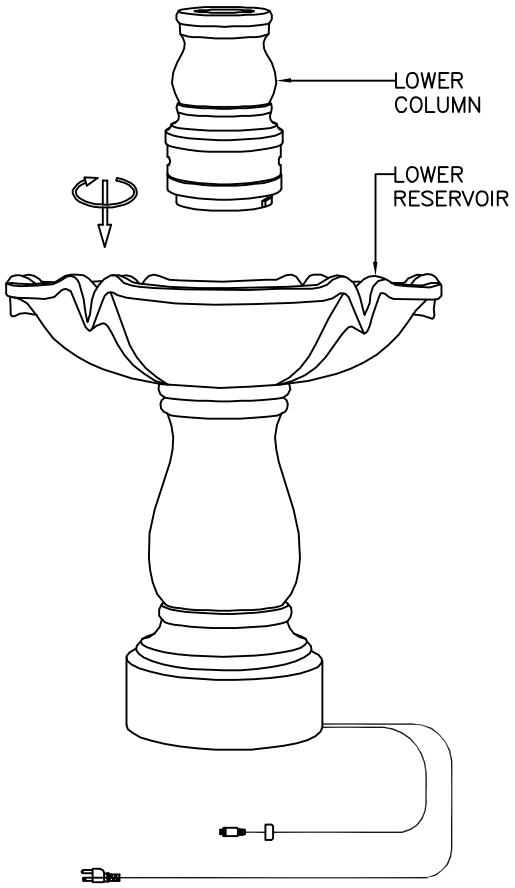

MODEL: 50333DT

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

FOUNTAIN ASSEMBLY

5. PLACE MIDDLE RESERVOIR ON TOP OF LOWER COLUMN AND ROTATE THE MIDDLE RESERVOIR CLOCKWISE TO SECURE.

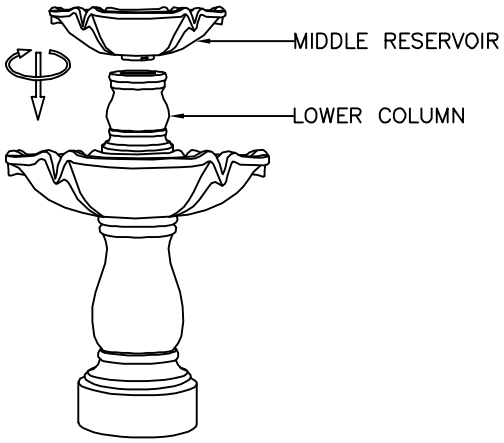

6. FEED LONG LED POWER CORD THROUGH THE HOLE IN UPPER COLUMN TOWARD BOTTOM OF THE UPPER COLUMN.

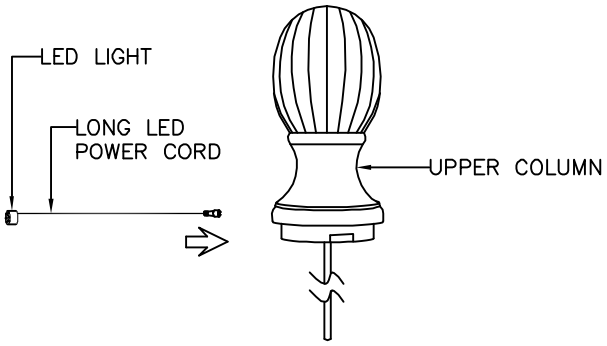

7. PLACE UPPER COLUMN INTO UPPER RESERVOIR AND ROTATE THE UPPER COLUMN CLOCKWISE TO SECURE.

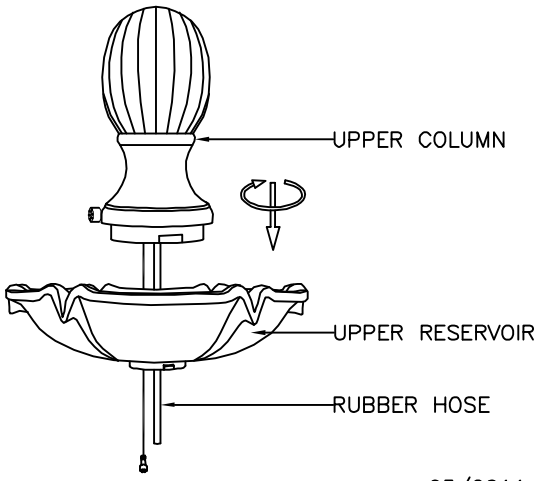

8. ATTACH THE LED LIGHT TO PIN IN UPPER RESERVOIR.

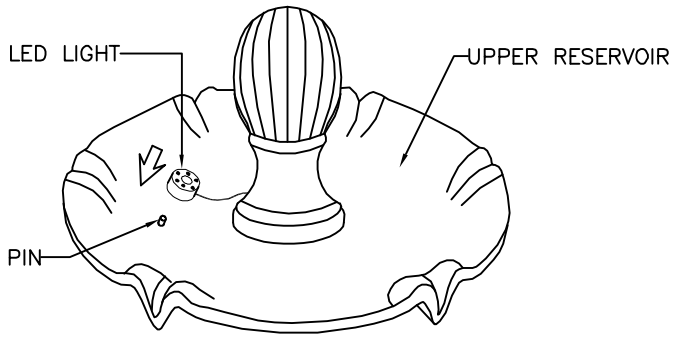

9. PLACE UPPER RESERVOIR WITH UPPER COLUMN ON TOP OF MIDDLE COLUMN AND ROTATE THE UPPER RESERVOIR CLOCKWISE TO SECURE.

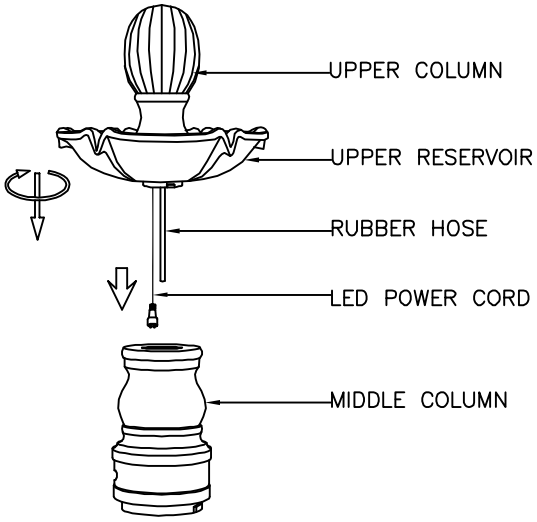

10. FEED THE MIDDLE LED POWER CORD THROUGH THE HOLE IN MIDDLE COLUMN TOWARD BOTTOM OF THE MIDDLE COLUMN.

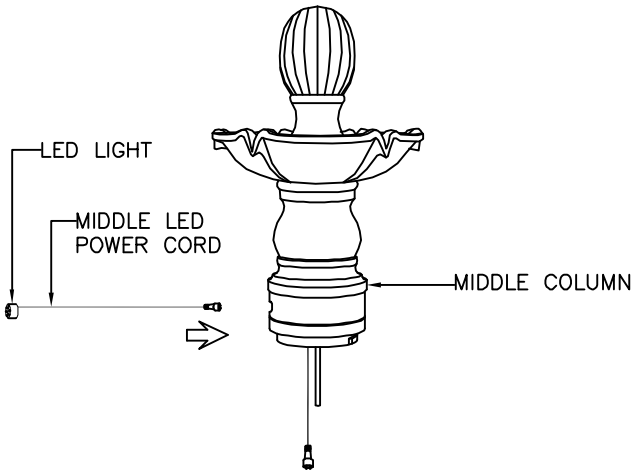

MODEL: 50333DT

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

FOUNTAIN ASSEMBLY

11. FEED THE LED POWER CORDS AND RUBBER HOSE THROUGH THE PLASTIC TUBE IN MIDDLE RESERVOIR TOWARD ENTRY OF LOWER COLUMN. THEN PLACE MIDDLE COLUMN WITH UPPER RESERVOIR AND UPPER COLUMN INTO MIDDLE RESERVOIR AND ROTATE THE MIDDLE COLUMN CLOCKWISE TO SECURE. ATTACH THE LED LIGHT TO PIN IN MIDDLE RESERVOIR.

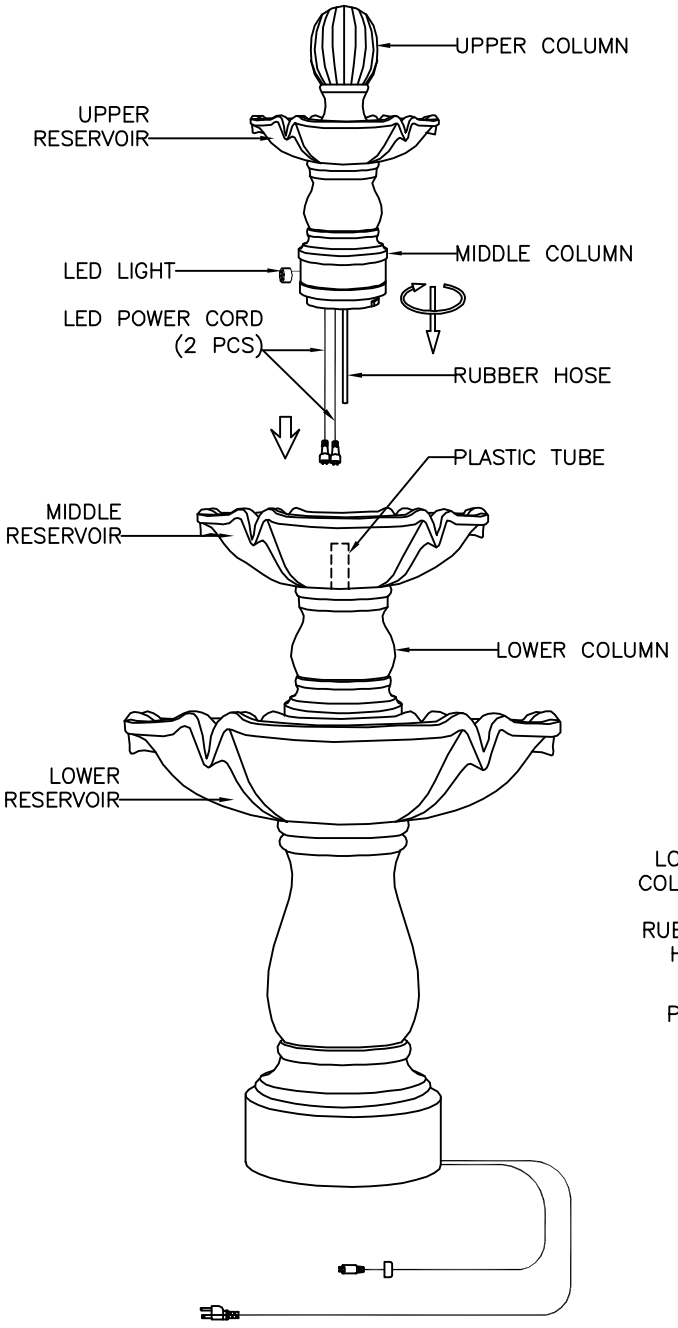

12. FEED (2) SHORT LED POWER CORDS THROUGH THE HOLES IN LOWER COLUMN TOWARD THE ENTRY OF THE LOWER COLUMN.

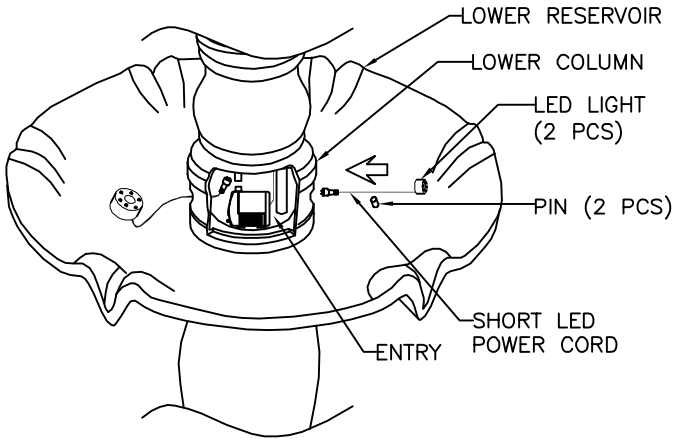

13. ATTACH PUMP TO RUBBER HOSE AND PLACE THE PUMP FLAT IN LOWER RESERVOIR, JOIN THE LIGHT CONNECTORS AND SCREW CAPS TO CONNECTORS TIGHTLY TOGETHE.
ATTACH (2) LED LIGHTS TO PINS IN LOWER RESERVOIR. TUCK THE CORDS CAREFULLY INSIDE THE LOWER COLUMN, THEN PLACE LID TO LOWER COLUMN TO COVER THE ENTRY.

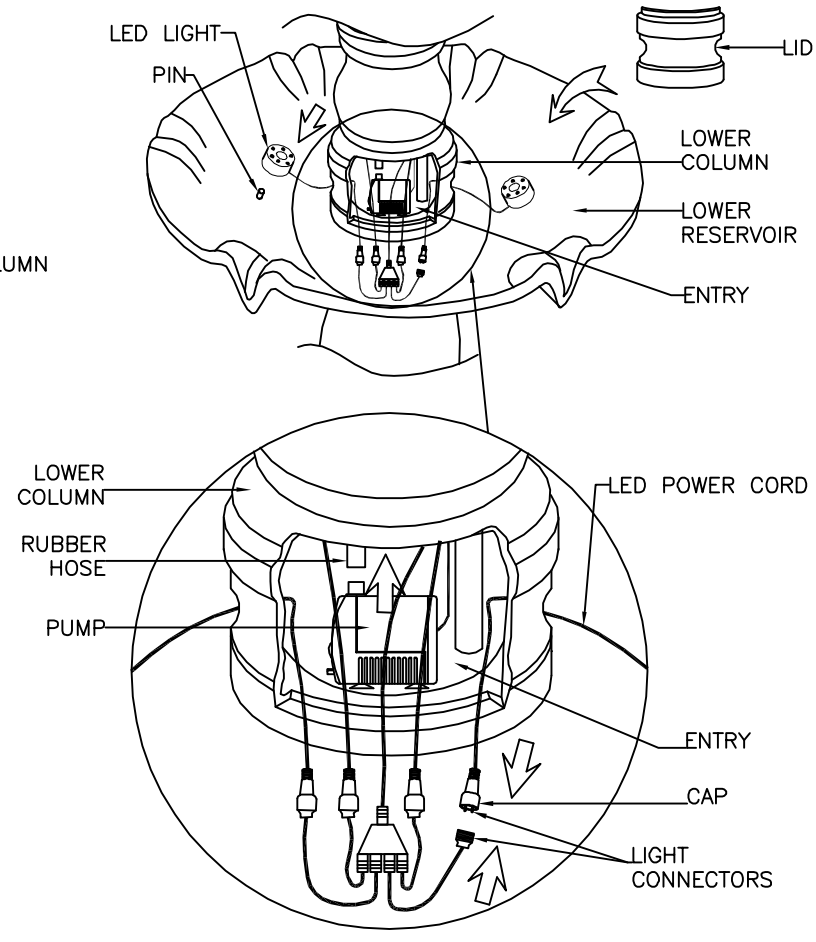

MODEL: 50333DT

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

FOUNTAIN ASSEMBLY

14. FILL RESERVOIRS WITH 6.5 GALLONS OF WATER FROM UPPER RESERVOIR TO COMPLETELY SUBMERSE THE PUMP.

NOTE: DISTILLED WATER IS RECOMMENDED TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD–UP.)

15. JOIN THE CONNECTORS AT TRANSFORMER AND SCREW THE CAP TO CONNECTOR TIGHTLY TOGETHER.

16. PLUG PUMP POWER CORD AND TRANSFORMER POWER CORD INTO SOCKETS, YOUR NEW FOUNTAIN IS READY FOR USE.

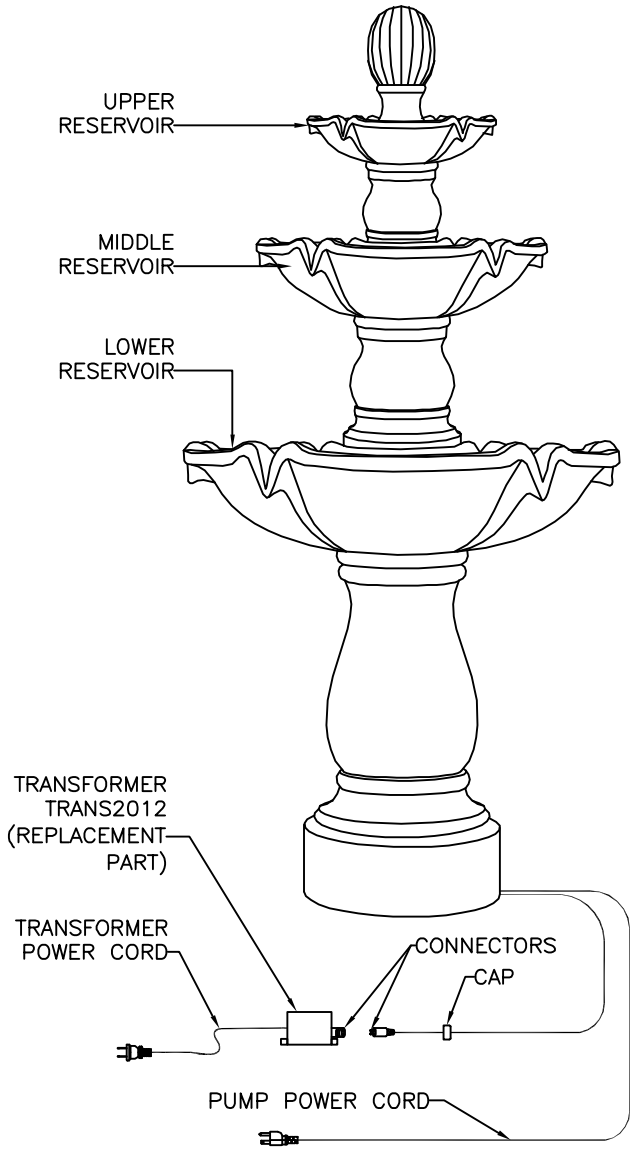

TROUBLE SHOOTING:

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK PLUG AT THE SOCKET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.

2. NEXT CHECK TO MAKE SURE THE OUTLET IS POWERED.

3. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

SPLASHING DISCLAIMER:

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.

IMPORTANT PUMP INFORMATION:

PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING.

WATER:

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

WARNING:

* ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD–UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.

** THIS FOUNTAIN IS RATED FOR OUTDOOR USE.

*** THIS UNIT MUST BE CONNECTED TO A SUPPLY CIRCUIT THAT IS PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI). THE GFCI SHOULD BE TESTED ON A ROUTINE BASIS. TO TEST THE GFCI, PUSH THE TEST BUTTON. THE GFCI SHOULD INTERRUPT POWER. PUSH THE RESET BUTTON. POWER SHOULD BE RESTORED. IF THE GFCI FAILS TO OPERATE IN THIS MANNER, THE GFCI IS DEFECTIVE.

AVAILABLE PARTS ARE:
PUMP1017 (PUMP)
TRANS2012 (TRANSFORMER)